
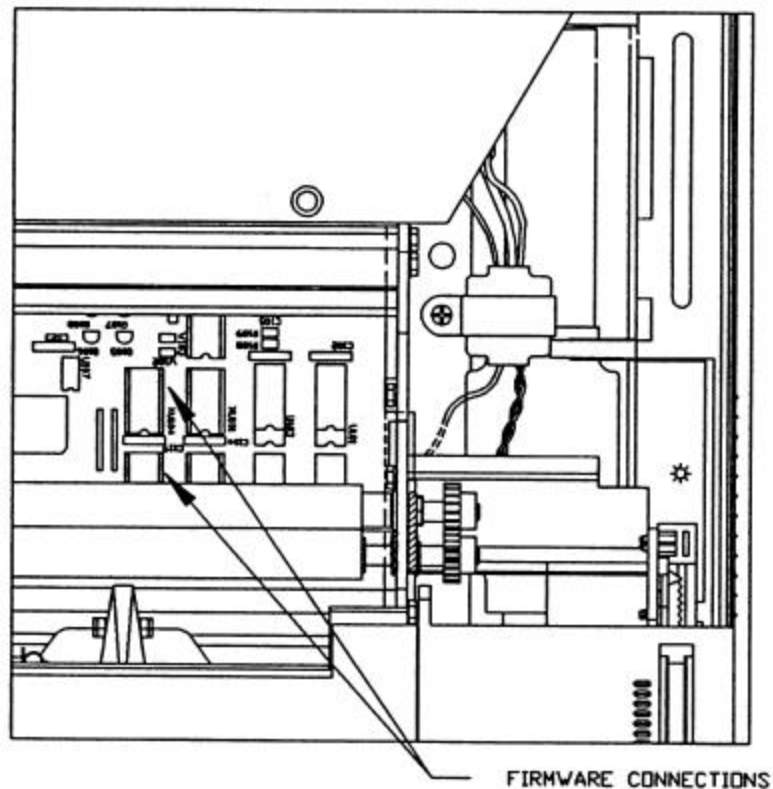


PERFORMAX FIRMWARE INSTALLATION INSTRUCTIONS

Part No. BBF-103065.1 Rev.*

1. Press in on sides of the printer to release the cover latches, then push the rear cover back to open the printer.
2. Remove the ribbon cartridge
3. Remove the screws on the left and right endplate that hold the ribbon/ROM access tray in place.
4. Lift the ribbon/ROM access tray and rotate it counterclockwise. Do not remove ribbon connector.
5. Remove XU 103 and XU 104.

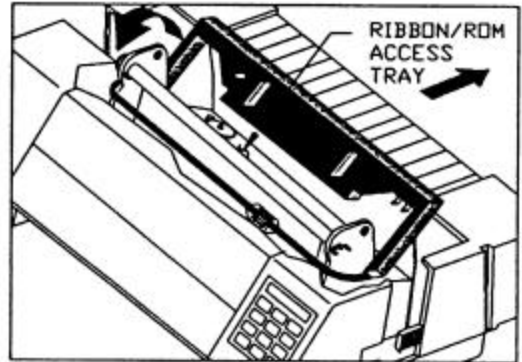

6. Install replacement firmware (XU number is listed on the PROM).
7. Re-assemble in the reverse order (install back left ribbon tray screw first.)