


INSTALLATION INSTRUCTIONS


(For Printstand Keyboard Support Arms)

BBF-104756 Rev.*

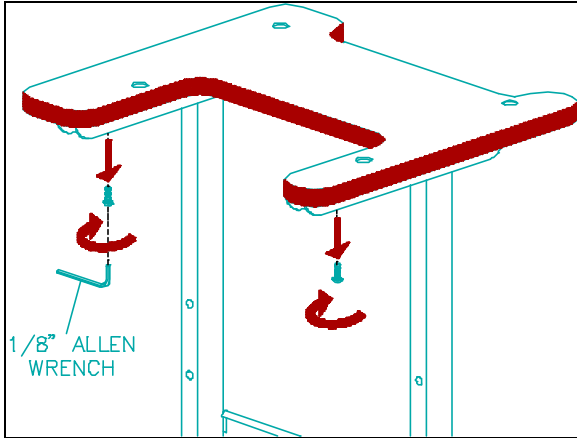


1. NOTE: To install this product you will need a 1/8" Allen wrench, a 5/32" Allen wrench, and an assembled KSR printstand (not included).

2. Remove the front (2) screws from an assembled KSR printer stand (AAA-104468-1) with a 1/8" Allen wrench.

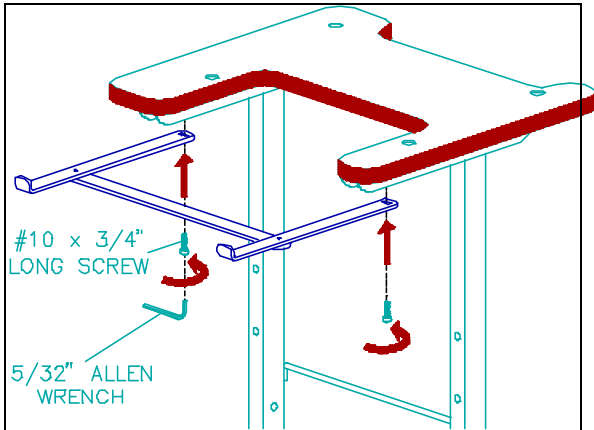

3. Using the (2) #10 x 3/4" long screws (included with kit) and a 5/32" Allen wrench, install the keyboard support arms as shown.

4. Position the KSR keyboard on the support arms as shown.

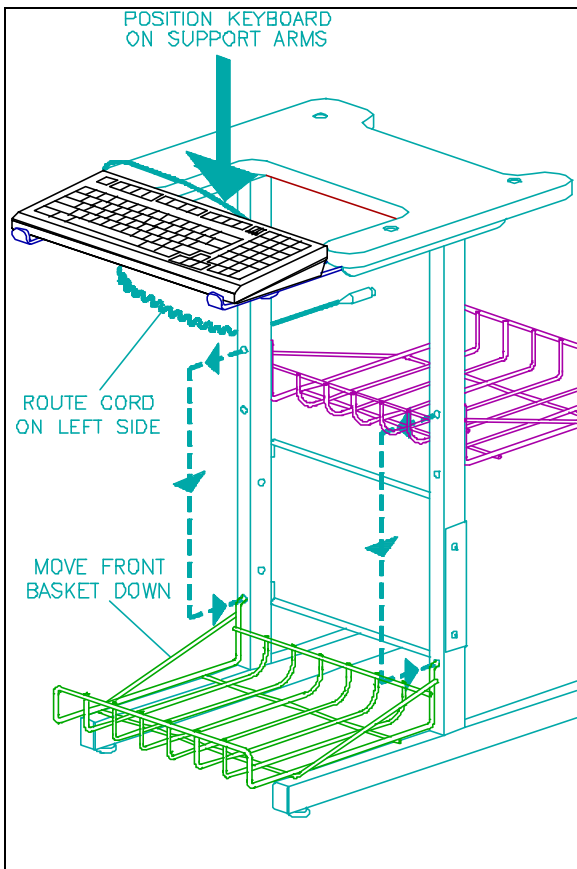

5. Route the keyboard cord around the left side of the printer stand as shown. (CAUTION: Do not allow the cord to interfere with the printer's paper path).

cord

6. NOTE: Move front basket down to the lowest position to allow maximum clearance for the operator's knees.

Should you require assistance during assembly, please call our Customer Service Department.... Monday-Friday : 8am - 5pm EST (800) 476 - 2450